
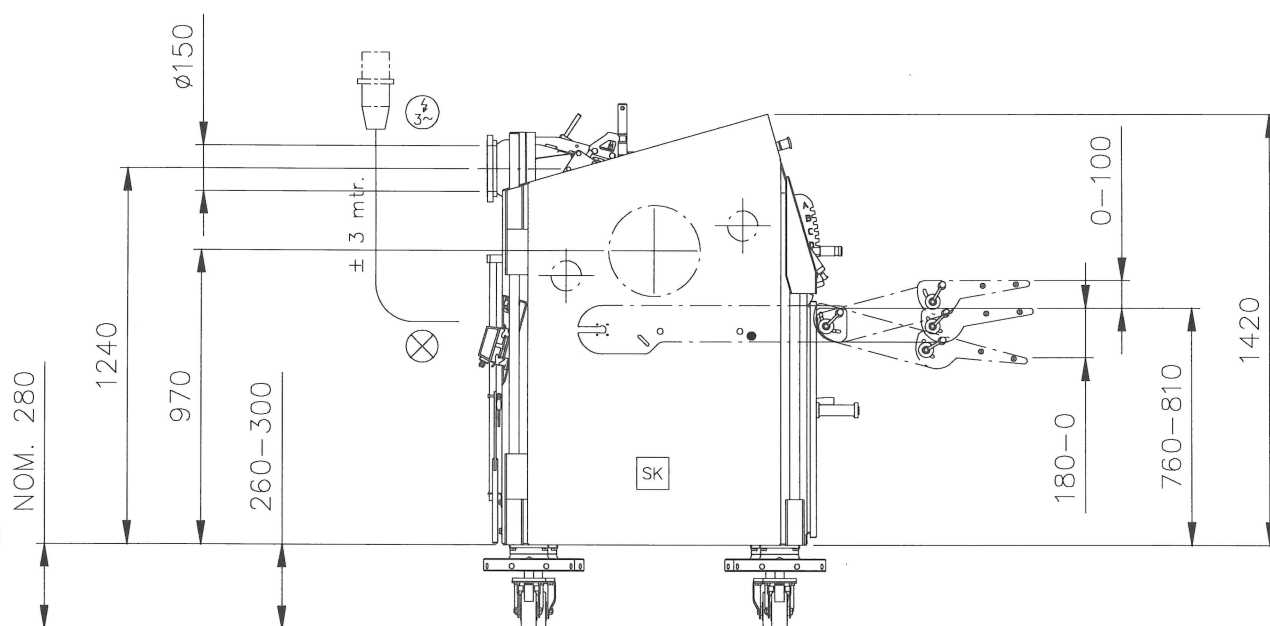







REVO PORTIONING UNIT

TRP 630

TA1305

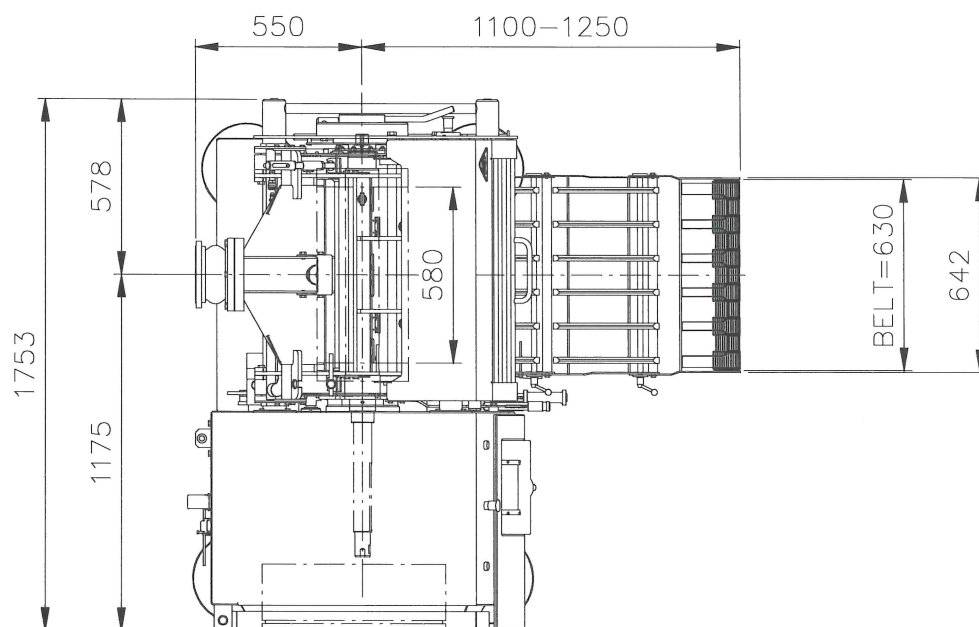

MEDIUM			PRESSURE	TEMPERATURE	CONNECTION	CONSUMPTION
	power supply	W1			4 x 2.5 mm ²	5 kWh
	compressed air		800-1000 kPa	- °C	 G 3/4"	200 Nm ³ /h
	Earth Leakage Current	When using a Residual Current Device (RCD) the following rules apply: - Use TYPE-B RCD (Detects AC, DC and pulsating DC currents)! - Use one RCD per machine.				
	sound pressure level	LpA ≤85 Db(A)				
MASS			1100 kg			