
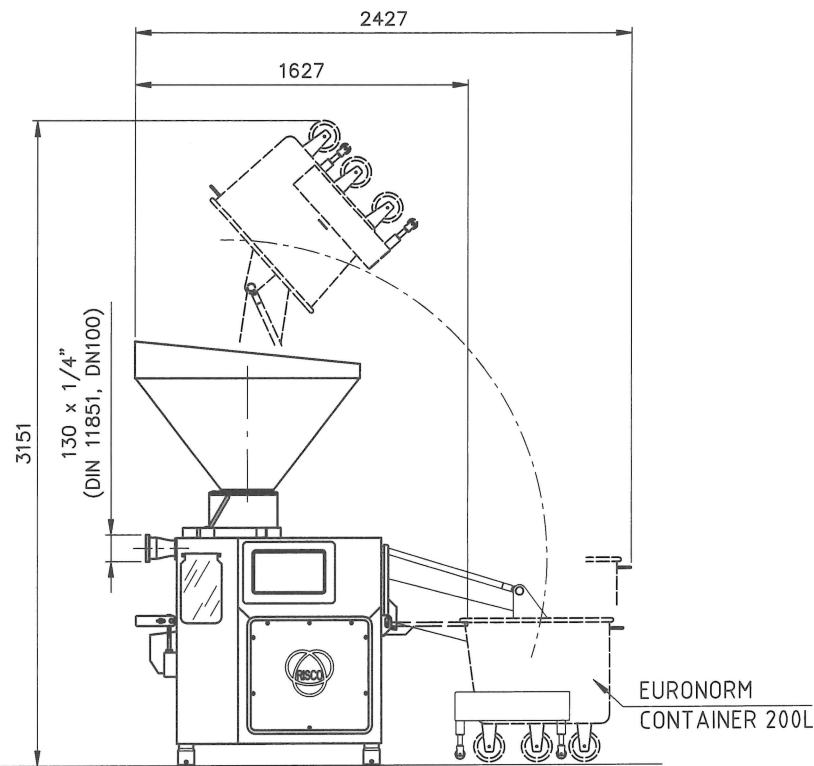


TA1115B1-B4  
FILLER WITH LIFTING DEVICE  
TA1115B5-B8  
FILLER WITHOUT LIFTING DEVICE

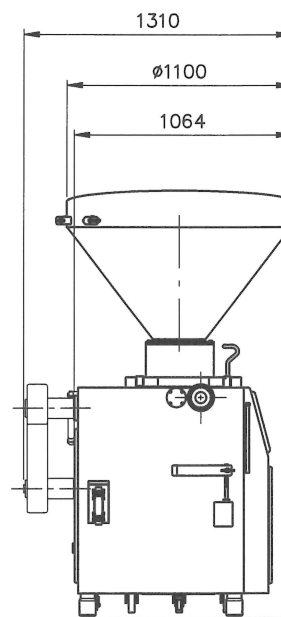

MEDIUM		PRESSURE	TEMPERATURE	CONNECTION	CONSUMPTION
	Power supply	W1		3-phase + pe 4 x 4 mm <sup>2</sup>	11 kWh
	Earth Leakage Current	When using a Residual Current Device (RCD) the following rules apply: - Use TYPE-B RCD (Detects AC, DC and pulsating DC currents) - Use one RCD per machine.			
	sound pressure level	LpA ≤80 Db(A)			
MASS 1000 kg					